

University of Dundee

Effects of installation advancement ratio on cyclic uplift response of a single-helix screw pile

Wang, Wei; Brown, Michael; Ciantia, Matteo; Sharif, Yaseen; Davidson, Craig; Cerfontaine, Benjamin

DOI:
[10.59490/seg23.2023.615](https://doi.org/10.59490/seg23.2023.615)

Publication date:
2023

Licence:
CC BY

Document Version
Peer reviewed version

[Link to publication in Discovery Research Portal](#)

Citation for published version (APA):

Wang, W., Brown, M., Ciantia, M., Sharif, Y., Davidson, C., & Cerfontaine, B. (2023). *Effects of installation advancement ratio on cyclic uplift response of a single-helix screw pile: Experimental and numerical investigation in sand*. Abstract from Symposium on Energy Geotechnics, Delft, Netherlands.
<https://doi.org/10.59490/seg23.2023.615>

General rights

Copyright and moral rights for the publications made accessible in Discovery Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Peer-reviewed Conference Contribution

Effects of installation advancement ratio on cyclic uplift response of a single-helix screw pile: experimental and numerical investigation in sand

Wei Wang^{1,*}, Michael Brown¹, Matteo Ciantia¹, Yaseen Sharif¹, Craig Davidson¹ and Cerfontaine Benjamin²

¹ School of Science and Engineering, University of Dundee, Dundee, UK

² Department of Civil, Maritime and Environmental Engineering, University of Southampton, UK

* Corresponding author: 2422030@dundee.ac.uk

A screw pile consists of one or several helices connected on a central straight shaft or core. These kinds of piles are widely used onshore and typically installed by applying torque at the pile head with additional vertical compressive force (also referred to as crowd force) if required. Current standards and industrial guidelines recommend that installation follows the pitch-matched approach i.e. advancement ratio $AR = 1.0$ [1], which means that the pile vertical penetration for each rotation equals the helix pitch, because it is suggested that this leads to reduced installation disturbance.

$$AR = \frac{\Delta z}{p_h}$$

where Δz is the vertical penetration per rotation and p_h is the helix geometric pitch.

Recently this kind of pile has been proposed for upscaling from typical onshore sizes as an alternative silent foundation/anchoring solution for future offshore renewable energy application. This may include use as foundations for jacket structures or anchors for wind turbine in deeper water. However, the increase in pile sizes may require prohibitive vertical force if pitch-matched installation is adopted [2] in sand. One of the solutions to this is over-flighting ($AR < 1.0$) where the pile is over rotated during installation. When the pile is over-flighted, sand below the helix can move upward through the helix opening resulting in a higher stress and potential densified zone above the helix (Figure 1(a)). The increased stress above the helix can push the pile downward and consequently reduce or even eliminate the vertical installation force. In addition, the increased stress and potential densification in the soil above the helix can result in better monotonic uplift performance [3, 4, 5, 6, 7].

As foundations for offshore renewable energy applications, the screw piles also need to be able to perform under cyclic loading from wind, wave and current for example. Investigations of uplift cyclic performance of pitch-matched screw pile installation have been reported, but the over-flighting effects have not received significant attention. To give confidence in the maintenance of the beneficial effects of over-flighting on cyclic performance, centrifuge tests and discrete element modelling (DEM) were used in this study. The centrifuge tests provide more reliable physical evidence than 1g tests but are less costly and more accessible than field test. Based on the results of centrifuge test, the DEM models are validated and used to allow separate evaluation of the mechanism of the helix and the pile shaft and assessment of soil state evolution during cycling, which are difficult to capture in field or centrifuge tests.

The centrifuge tests show that the screw piles installed at lower AR accumulate displacement at lower rates with cycling, which is also captured by the DEM (Figure 1(b)). In addition, DEM suggests that shaft behavior controls cyclic performance because the shaft friction resistance is stiffer than the helix bearing resistance at small displacements. The radial stress on the pile shaft can be enhanced by over-flighting installation. Although it degrades with cycling, the enhanced radial stress due to over-flighting remains higher than that of the pitch-matched pile and therefore the over-flighted piles have improved cyclic performance. On the basis of improved cyclic uplift performance and low vertical installation force, over-flighting installation may be utilized for offshore screw

piles performing under cyclic uplift loading where installation forces are a concern or loading is predominantly one-way tensile loading.

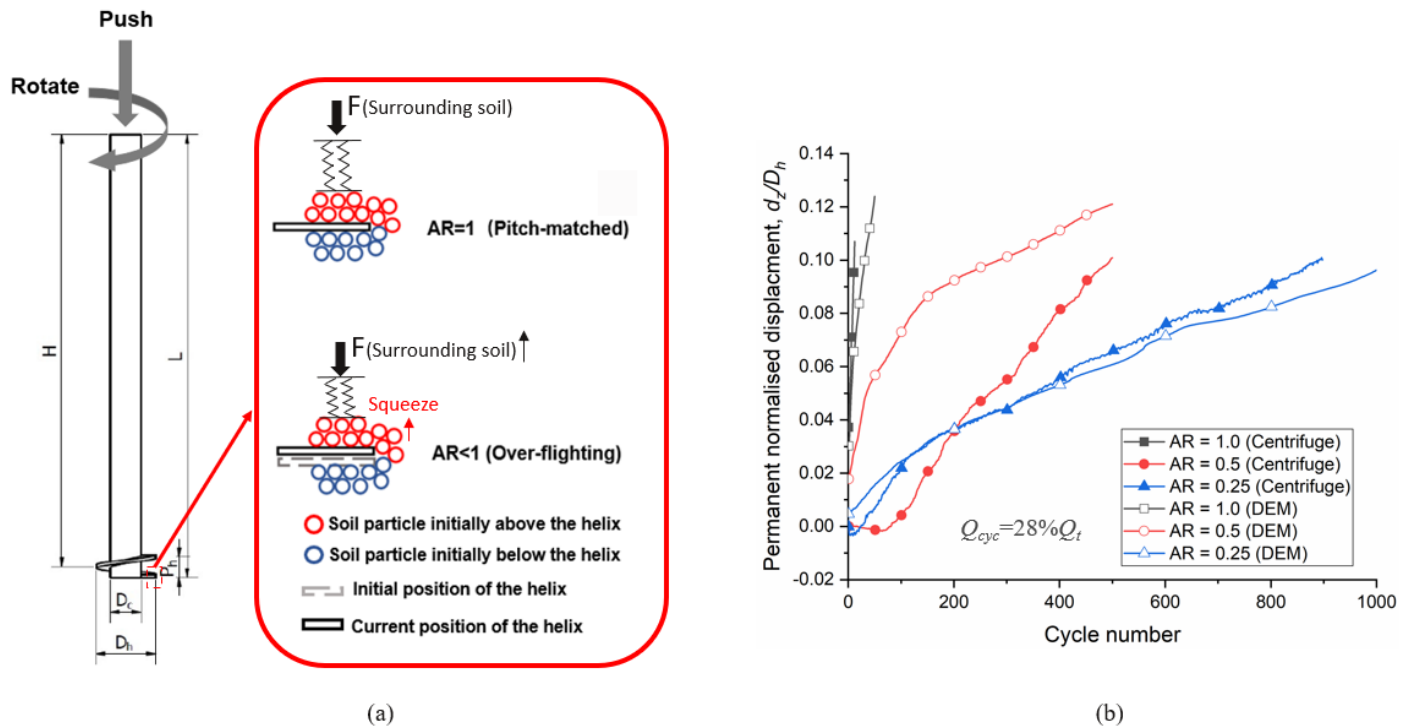


Figure 1: Effects of over-flying installation: a) idealized over-flying effects on particle movement; b) AR effects on cyclic displacement accumulation (comparison of centrifuge and DEM simulation).

Contributor statement

Wei Wang: Conceptualization, Formal analysis, Visualization, Software, Resources and Writing-Original draft. Michael Brown: Conceptualization, Supervision and Writing-Review & Editing. Matteo Ciantia: Supervision and Software. Yaseen Sharif: Resources and Software. Craig Davidson: Resources. Cerfontaine Benjamin: Software

Acknowledgments

The first author would like to acknowledge the financial support of the China Scholarship Council (CSC) and the University of Dundee.

References

- [1] British Standards Institution. BS8004: Code of practice for foundations. London, UK: BSI.2015.
- [2] Davidson C, Brown M, Cerfontaine B, Al-Baghdadi T, Knappett J, Brennan AJ, et al. (2022). Physical modelling to demonstrate the feasibility of screw piles for offshore jacket-supported wind energy structures. *Geotechnique*, 72(2),108-26.
- [3] Cerfontaine B, Brown MJ, Davidson C, Sharif YU, Huisman M, Ottolini M. (2022). Optimized screw pile design for offshore jacket foundations in medium-dense sand. *Géotechnique Letters*,12(2),114-9.
- [4] Cerfontaine B, Brown MJ, Knappett JA, Davidson C, Sharif YU, Huisman M, et al. (2023), Control of screw pile installation to optimise performance for offshore energy applications. *Géotechnique*, 73(3), 234-49.
- [5] Cerfontaine B, Ciantia M, Brown MJ, Sharif YU. (2021). DEM study of particle scale and penetration rate on the installation mechanisms of screw piles in sand. *Computers and Geotechnics*,139.
- [6] Sharif Y, Brown MJ, Ciantia M, Cerfontaine B, Davidson C, Knappett JA, et al. (2021). Assessing single-helix screw pile geometry on offshore installation and axial capacity. *Proceedings of the Institution of Civil Engineers - Geotechnical Engineering*,174(5),512-29.
- [7] Sharif YU, Brown MJ, Cerfontaine B, Davidson C, Ciantia MO, Knappett JA, et al. (2021). Effects of screw pile installation on installation requirements and in-service performance using the discrete element method. *Canadian Geotechnical Journal*,58(9),1334-50.