

University of Dundee

27.5W/m² collection efficiency solar laser using a diffuse scattering cooling liquid

Smyth, C. J. C.; Mirkhanov, S.; Quarterman, A. H.; Wilcox, K. G.

Published in:
Applied Optics

DOI:
[10.1364/AO.386409](https://doi.org/10.1364/AO.386409)

Publication date:
2020

Document Version
Publisher's PDF, also known as Version of record

[Link to publication in Discovery Research Portal](#)

Citation for published version (APA):
Smyth, C. J. C., Mirkhanov, S., Quarterman, A. H., & Wilcox, K. G. (2020). 27.5W/m² collection efficiency solar laser using a diffuse scattering cooling liquid: erratum. *Applied Optics*, 59(3), 800.
<https://doi.org/10.1364/AO.386409>

General rights

Copyright and moral rights for the publications made accessible in Discovery Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from Discovery Research Portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain.
- You may freely distribute the URL identifying the publication in the public portal.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

27.5 W/m² collection efficiency solar laser using a diffuse scattering cooling liquid: erratum

C. J. C. SMYTH,^{1,*} S. MIRKHA NOV,¹ A. H. QUARTERMAN,^{1,2} AND K. G. WILCOX¹

¹*School of Science and Engineering, University of Dundee, Dundee DD1 4HN, UK*

²*Coherent Scotland, West of Scotland Science Park, Maryhill Road, Glasgow G20 0XA, UK*

*Corresponding author: C.Z.Smyth@dundee.ac.uk

Received 18 December 2019; posted 18 December 2019 (Doc. ID 386409); published 17 January 2020

In this erratum we clarify our previously published paper [Appl. Opt. 57, 4008 (2018)], where we used a solar spectrum truncated to a maximum wavelength of 830 nm in the numerical modelling, but did not state this in the paper. Here, we present a graph of the numerically modelled absorption in the Nd:YAG rod as a function of the diffuse reflectivity of the chamber walls using the full solar spectrum, confirming that the theoretical maximum possible absorption we predict is in agreement with literature values. © 2020 Optical Society of America

<https://doi.org/10.1364/AO.386409>

In [1], collection efficiency solar laser using a diffuse scattering cooling liquid,” Fig. 2 displays a computational model generated graph of the percentage of solar rays absorbed in the Nd:YAG rod as a function of the reflectivity of the diffuse scatterer in contact with the side wall of the rod [1]. This figure was generated using a standard AM 1.5 solar spectrum that was truncated to a maximum wavelength of 830 nm to increase computational efficiency. This wavelength is slightly above the maximum absorption wavelength in Nd:YAG and contains 59.5% of the total power in the solar spectrum. We did not state in Ref. [1] that a truncated spectrum had been used in the model.

Figure 1 is the equivalent graph of the modelled absorbed rays as a function of the reflectivity of the diffuse scatterer with the entire solar spectrum considered.

The modelled absorption, reaches a maximum of 15% for 100% side wall diffuse reflectivity. This is slightly lower than the maximum possible absorption in Nd:YAG of 16%, when only the spectral overlap of the absorption spectrum of Nd:YAG with the solar spectrum is considered [2,3]. The difference is due to the additional loss from the Fresnel transmission of rays interacting with the end faces of the laser rod.

With regards to Table 1 in Ref. [1] where we report the experimentally measured loss from our collection optics we would like to reiterate that all losses, including the total loss, were individually experimentally measured and none calculated.

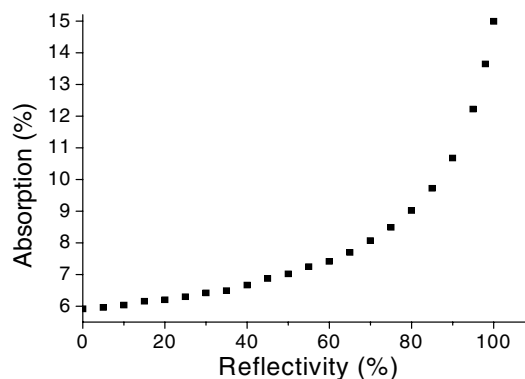


Fig. 1. Modelled percentage of the entire solar spectrum absorbed by the Nd:YAG rod as a function of reflectivity of the diffuse scatterer in contact with the side wall of the rod.

REFERENCES

1. C. J. C. Smyth, S. Mirkhanov, A. H. Quarterman, and K. G. Wilcox, “27.5 W/m² collection efficiency solar laser using a diffuse scattering cooling liquid,” *Appl. Opt.* **57**, 4008–4012 (2018).
2. B. Zhao, C. Zhao, J. He, and S. Yang, “The study of active medium for solar-pumped solid-state lasers,” *Acta. Opt. Sin.* **2007**, 1–9 (2006).
3. J. Almeida and D. Liang, “Design of TEM₀₀ mode side-pumped Nd:YAG solar laser,” *Opt. Commun.* **333**, 219–225 (2014).