

University of Dundee

**Numerical modelling of the bottom gravity current in an obstructed channel with trapezoidal cross-section**

Laanearu, Janek; Kaur, Katrin; Malcangio, Daniela; Cuthbertson, Alan; Adduce, Claudia; De Falco, Maria Chiara

DOI:

[10.24425/136660](https://doi.org/10.24425/136660)

Publication date:

2020

Document Version

Peer reviewed version

[Link to publication in Discovery Research Portal](#)

*Citation for published version (APA):*

Laanearu, J., Kaur, K., Malcangio, D., Cuthbertson, A., Adduce, C., De Falco, M. C., Negretti, E., & Sommeria, J. (2020). *Numerical modelling of the bottom gravity current in an obstructed channel with trapezoidal cross-section*. 247-248. Abstract from 6th IAHR Europe Congress, Warsaw, Poland. <https://doi.org/10.24425/136660>

**General rights**

Copyright and moral rights for the publications made accessible in Discovery Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

**Take down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## Numerical modelling of the bottom gravity current in an obstructed channel with trapezoidal cross-section

Janek LAANEARU<sup>1</sup>, Katrin KAUR<sup>1</sup>, Daniela MALCANGIO<sup>2</sup>, Alan CUTHBERTSON<sup>3</sup>, Claudia ADDUCE<sup>4</sup>, Maria Chiara DE FALCO<sup>4</sup>, Eletta NEGRETTI<sup>5</sup>, Joel SOMMERIA<sup>5</sup>

<sup>1</sup> Tallinn University of Technology, Estonia  
email: janek.laanearu@taltech.ee, katrin.kaur@taltech.ee

<sup>2</sup> Polytechnic University of Bari, Italy  
email: daniela.malcangio@poliba.it

<sup>3</sup> Dundee University, UK  
email: a.j.s.cuthbertson@dundee.ac.uk

<sup>4</sup> Roma Tre University, Italy  
email: claudia.adduce@uniroma3.it, mariachiara.defalco@uniroma3.it

<sup>5</sup> Laboratory of Geophysical and Industrial Flows, France  
email: eletta.negretti@legi.cnrs.fr, Joel.sommeria@legi.cnrs.fr

### ABSTRACT

The dynamics of bottom gravity currents in a laboratory-scale, stratified-flow flume is modelled using a 3D CFD tool. Also, the dense-water intrusion along a channel with a trapezoidal cross-section is characterized hydraulically. The numerical experiments are designed to aid qualitative interpretation of the formation of density-driven, bi-directional stratified flows. The turbulence characteristics of the stratified flow are introduced to investigate the internal-flow hydraulic regimes and the interface mixing between water layers.

### 1. Materials

An experimental study was conducted at the CNRS Coriolis Rotating Platform at LEGI, Grenoble, to investigate uni- and bi-directional stratified flows generated along a trapezoidal cross-section channel (Adduce et al. 2019) under rotating and non-rotating conditions, with both fixed and erodible bed layer conditions. Experimental measurements focused on obtaining high-resolution velocity and density fields in different vertical planes spanning the width of the channel using 2D Particle Image Velocimetry (PIV) and Laser Induced Fluorescence (LIF), as well as acoustic doppler velocimeters (ADV) and micro-conductivity probes positioned in several cross-channel sections. To investigate the resulting internal-flow dynamics numerically, Computational Fluid Dynamics (CFD) simulations were undertaken with the specific OpenFOAM solver. The model domain of the flume is three-dimensional, and consists of three parts: (i) a basin with the salt-water inflow, (ii) the horizontal trapezoidal channel, and (iii) a fresh water basin with an open boundary (for a detailed description of a laboratory-scale, stratified-flow flume arrangement, see Adduce et al., 2019).

### 2. Models

Laanearu and Davies (2007) formulated an internal-flow energy function for the hydraulic modelling of bi-directional stratified flows in non-rectangular channels. The cross-sectional channel flow shapes can be presented quantitatively in the internal-flow energy function by a shape factor ( $\xi > 1$ ) that represents the ratio of bank-full area to cross-sectional area of flow. Hence, the limiting case of this shape factor corresponds to a rectangular cross-section with  $\xi = 1$ , while trapezoidal channel cross-sections can also be approximated with quadratic-type geometry. Within internal-flow hydraulic theory, the dimensionless internal flow head ( $H/w_0$ ) of the quadratic channels can be defined as follows:


$$H^* = \xi^2 K^* \left( \frac{h}{w_0} \right)^{2(\xi-1)} \left( \frac{w_0}{w} \right)^2 \left( \frac{1}{\left( \frac{h_2}{w_0} \right)^{2\xi}} - \frac{q^2}{\left( \left( \frac{h}{w_0} \right)^\xi - \left( \frac{h_2}{w_0} \right)^\xi \right)^2} \right) + h_2^* + h_s^* \quad (1)$$

where the dimensionless quantities in Eq. (1) are defined as follows:

$$H^* = \frac{H}{w_0}, K^* = \frac{Q_2^2}{2g'w_0^5} = \frac{K}{w_0^5}, \text{ where } K = \frac{Q_2^2}{2g'}, q^2 = \frac{Q_1^2}{Q_2^2}, h_2^* = \frac{h_2}{w_0}, h_s^* = \frac{h_s}{w_0} \quad (2)$$

In Eqs. (1) and (2),  $w_0$  is the channel width constant;  $h = h_1 + h_2$  is the total stratified fluid depth, where  $h_1$  and  $h_2$  are the upper and lower fluid layer thicknesses, respectively;  $h_s$  is sill height;  $g' = g(1 - \Gamma)$  is the reduced gravitational acceleration, where  $\Gamma = \rho_1/\rho_2$  represents the density ratio, with  $\rho_1$  and  $\rho_2$  being densities of the less-dense (fresh) upper layer and denser (saline) lower layer, respectively;  $Q_1$  and  $Q_2$  are the upper and lower fluid layer flow rates, respectively;  $q$  is the upper-to-lower layer volume flux ratio parameter.

The goal of the present study is to model numerically the development of the bottom gravity current dynamics along the trapezoidal channel for fixed salt-water volumetric inflow rates into the salt water basin (see Figure 1, where the snapshot of the CFD simulation is shown). The almost whole computational domain is meshed using a standard element of varying sizes. The boundary layer mesh is treated differently in the numerical experiments designed to investigate the turbulent-mixing characteristics that are important for the developing gravity current dynamics.

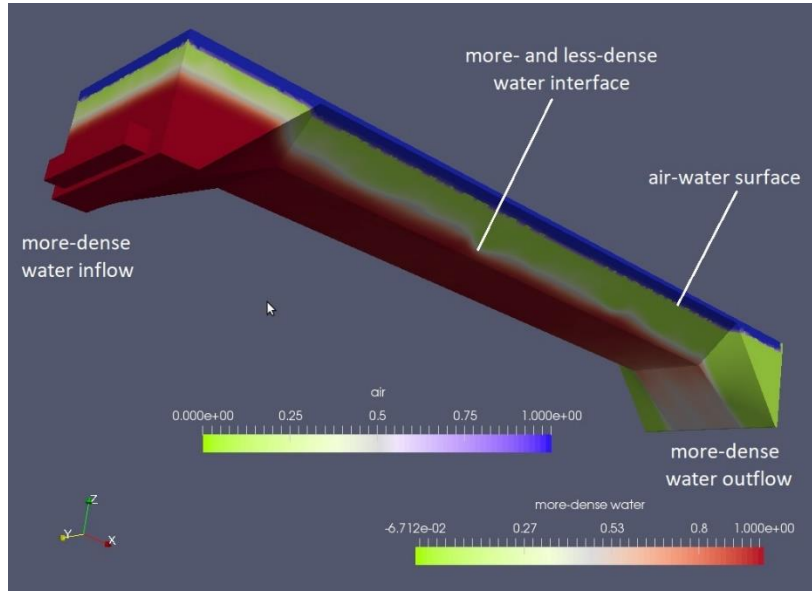

**Fig. 1.** Three-layer stratified fluid in the Computer Aid Domain (CAD) of an obstructed channel with trapezoidal cross-section. Excess densities of air and more-dense water in the model domain are shown. Colorbar: blue – air, green – less-dense water, red – more-dense water.

### 3. Methods

According to Laaneau and Davies (2007), the two-layer exchange flow is parameterized with the upper and lower layer densimetric Froude numbers  $Fr_1$  and  $Fr_2$ , such that:

$$Fr_1^2 = \xi \frac{u_1^2}{g'} \frac{h_2^{\xi-1}}{h^\xi - h_2^\xi}, \quad Fr_2^2 = \xi \frac{u_2^2}{g'h_2}, \quad (3)$$

with the composite Froude number  $G$  given by

$$G^2 = Fr_1^2 + Fr_2^2. \quad (4)$$

In the case of critical, sub- and super-critical stratified flows  $G^2 = 1$ ,  $G^2 < 1$  and  $G^2 > 1$ , respectively.

The numerically modelled 3D buoyancy-driven flow clearly demonstrates the hydraulically-driven internal flow, which is modified by the interfacial friction and the eddy-diffusivity dependent mixing.

### Acknowledgements

This work was supported by Tallinn University of Technology. The authors are acknowledge the grant from EU Hydralab+ to support the experimental study conducted at the CNRS Coriolis Rotating Platform at LEGI, Grenoble.

### References

- Adduce C, De Falco M C, Cuthbertson A., Laaneau J, Malcangio D, Kaur K, Negretti E, Sommeria J, Valrha T, Viboud S (2019) The Dynamics of Bi-Directional Exchange Flows: Implications for Morphodynamic Change within Estuaries, 9 pages paper presented at Hydralab+ Joint User Meeting, Bucharest, Romania.
- Laaneau J, Davies P (2007) Hydraulic control of two-layer flow in ‘quadratic’-type channels, *Journal of Hydraulic Research*, 45(1), 3-12.